




DTF-602
Dual i3200 Print Head

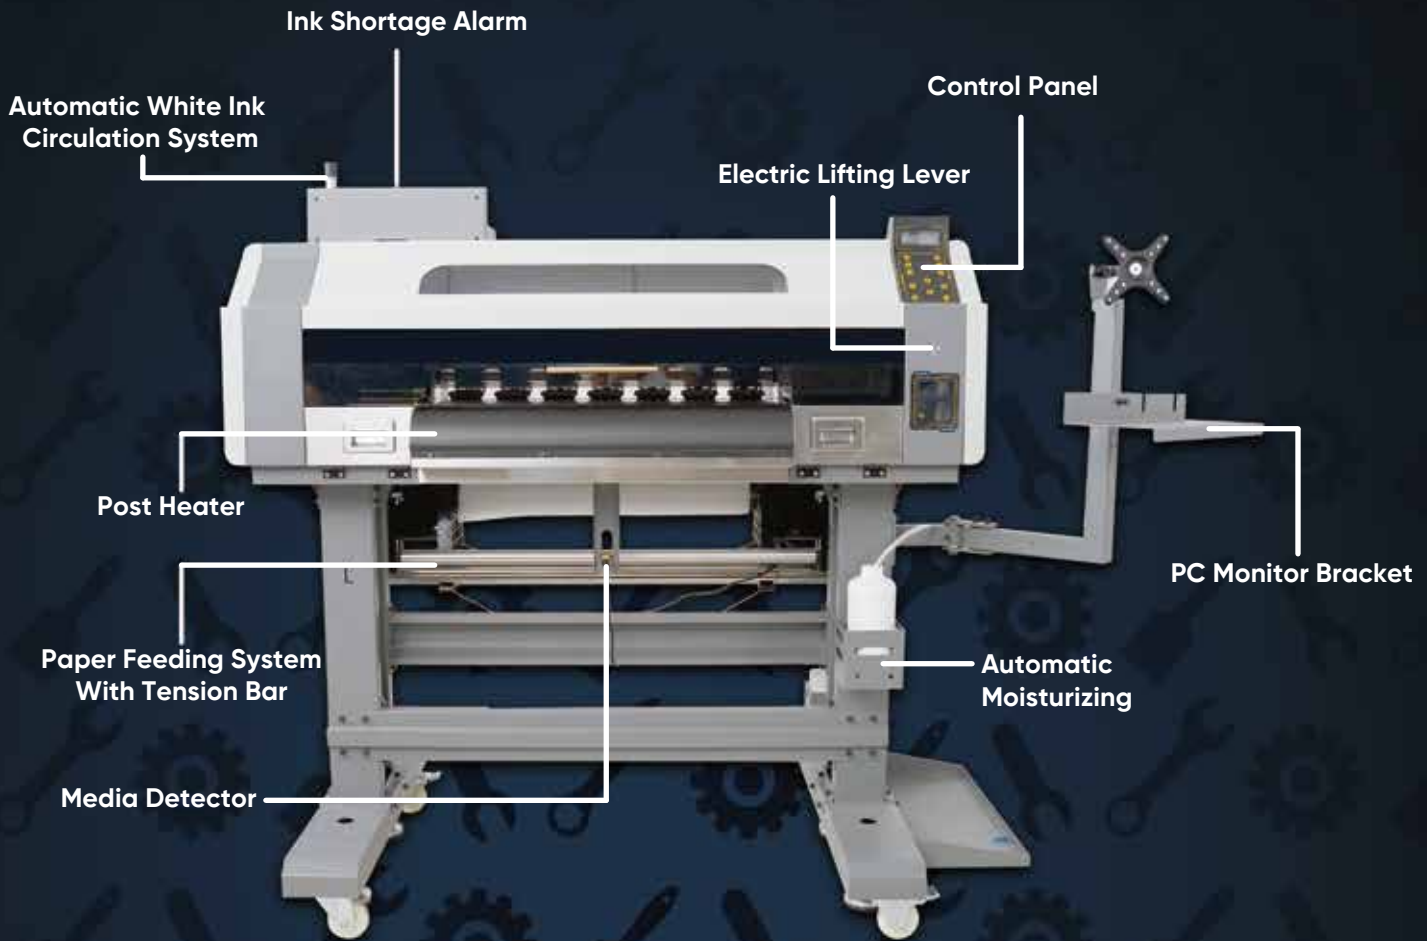

A1 DTF White ink Printer DTF-602


- Electric Lifting Lever
- Monitor Bracket & Host Stand
- Auto Film Feeding Control
- Camera-level Clarity And Free of Color Noise
- Ink Shortage Alarm/ Film Shortage Alarm/Waste Ink Alarm




verified



Specification

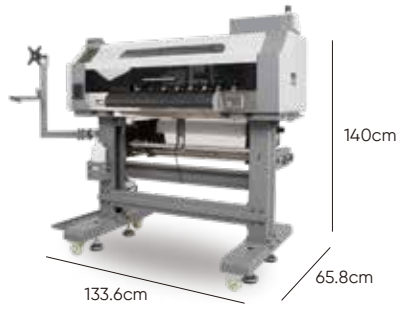Model	DTF-602	
Available width	≤600mm/24inches	
Print media	DTF Film	
Print media	Nylon, chemical fiber cotton, leather swimsuit, diving suit PVC, EVA .etc	
Print head	i3200A1*2	
Print speed	4Pass: 720*1200dpi 10-15m ² /h 6Pass: 720*1800dpi 5-10m ² /h 8Pass: 720*2400dpi 4-7m ² /h	
Print interface	Gigabit network port	
RIP software	PrintFactory	
Operating system	Windows 10/Windows 11	
Electrical parameters	220V/110V 1.5KW	
Size and weight	Machine:1336*658*1400mm N.W150kg Package:1464*1000*711mm, G.W 180kg	

Features

Printer Features	Front and rear arc plate heating	
	Platform suction	
	white ink circulation with stirrer	
	Ink shortage alarm	
	Anti collision of nozzle	
	One key automatic cleaning	
	Integrated auto-lifting ink station	
Built in computer and monitor combined bracket		
Shaker Features	Front heat plate	
	Conveyor belt transmission	
	Rotating touch screen	
	Two stage dryer	
	Smart auto-take up system	






DTF Printer Powder Dryer Machine 654

Extended+two-stage drying Automatic powder Recycling

- Suitable for high-speed printing two-head machines
- Universal matching, Easy to use
- Less manpower, with multiple functions
- More convenient to make a proof cut while printing
- Suit for dtf pet film digital printer, width $\leq 60\text{CM}$
- Offset Print Transfer one-time forming No need cut , No need tear


Specification

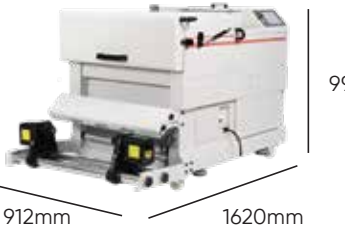Model	654	
Width	0-600mm	
Media transmission	NEW belt type	
Applicable media	Nylon, chemical fiber	
	cotton, leather, swimsuit diving suit, PVC, EVA .etc	
Take up function	Automatic inductive	
Heat and dry function	Front heat plate ,dry fixation, cold fans function	
Powder control	Shake Powderspeed control	
	Powder and amount control .etc	
Electrical parameters	Rated voltage:220V, Rated current:24A	
	Rated power: 5.2kw ,Energy consumption:4-5.2kw	
Weight	N.W:190kg / G.W:271kg	
Dimensions(mm)	Machine: 1620*mm*912mm*992mm	
	Package: 1420mm*1120mm*1113mm	

Structure



Shape upgrade



Powder dusting upgrade



Operating interface upgrade



Powder control and return new upgrade




Baking tunnel upgrade



Reel upgrade



Working Procedure

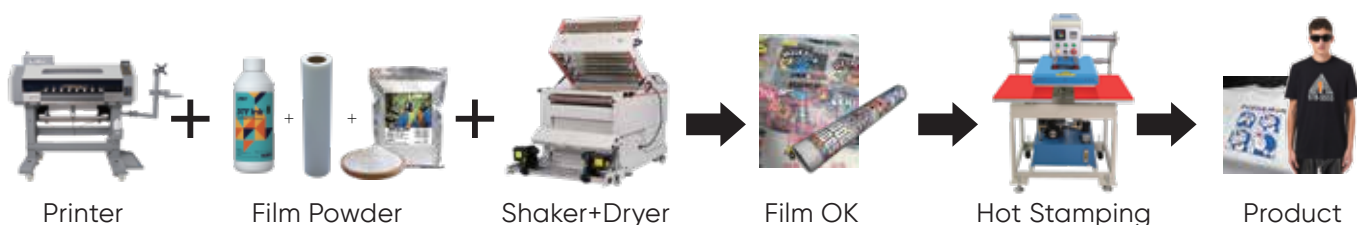



Super Power, Super Efficiency Smoke Extract Filter Machine PRF-100

JS100 smoke lampblack filter is designed for the machine need smoke discharge like sublimation color system.

Independent design don't care about matching with print machine, open it you can use it.

Adopt the full-scale design, inner oil gas, smoke and deodorize room are all large, good filter effect

Model	Wind	Voltage	Power
JS100	250m ³ /h	220V	250W
Size	Machine:530*571*1366mm		Packing:675*623*1540mm
Weight	N.W 60KG		G.W 122KG