


## A1 DTF White ink Printer DTF-6048 PRO

60cm Width, EPSON i3200A1 Head, High Speed Printer


- Electric Lifting Lever
- Monitor Bracket & Host Stand
- Auto Film Feeding Control
- Camera-level Clarity And Free of Color Noise
- Ink Shortage Alarm/ Film Shortage Alarm/Waste Ink Alarm

## Specification

Model	DTF-6048 PRO	
Width	600mm	
Number of nozzles	EPSON i3200A1*3	
Print Precision	4pass: 720*1200dpi, 10-15m <sup>2</sup> /h	
Print Speed	6pass: 720*1800dpi, 5-10m <sup>2</sup> /h 8pass: 720*2400dpi, 4-7m <sup>2</sup> /h	
Ink	Color: CMYK+W+LK+LLK+LC+LM Capacity: 5 Colors: 1.5L*5/color	
Rip software	PrintFactory	
Temperature	15-30°C	
Humidity	35-65%	
Electrical parameters	50hz/60hz,220V 7A,110V 14a, rated power 1.61kw	
Print interface	Gigabit network port	
Weight	N.W:150kg G.W:263kg	
Dimensions(mm)	Machine: 1336mm*658mm*1400mm	
	Package: 1920mm*1020mm*720mm	

## Features



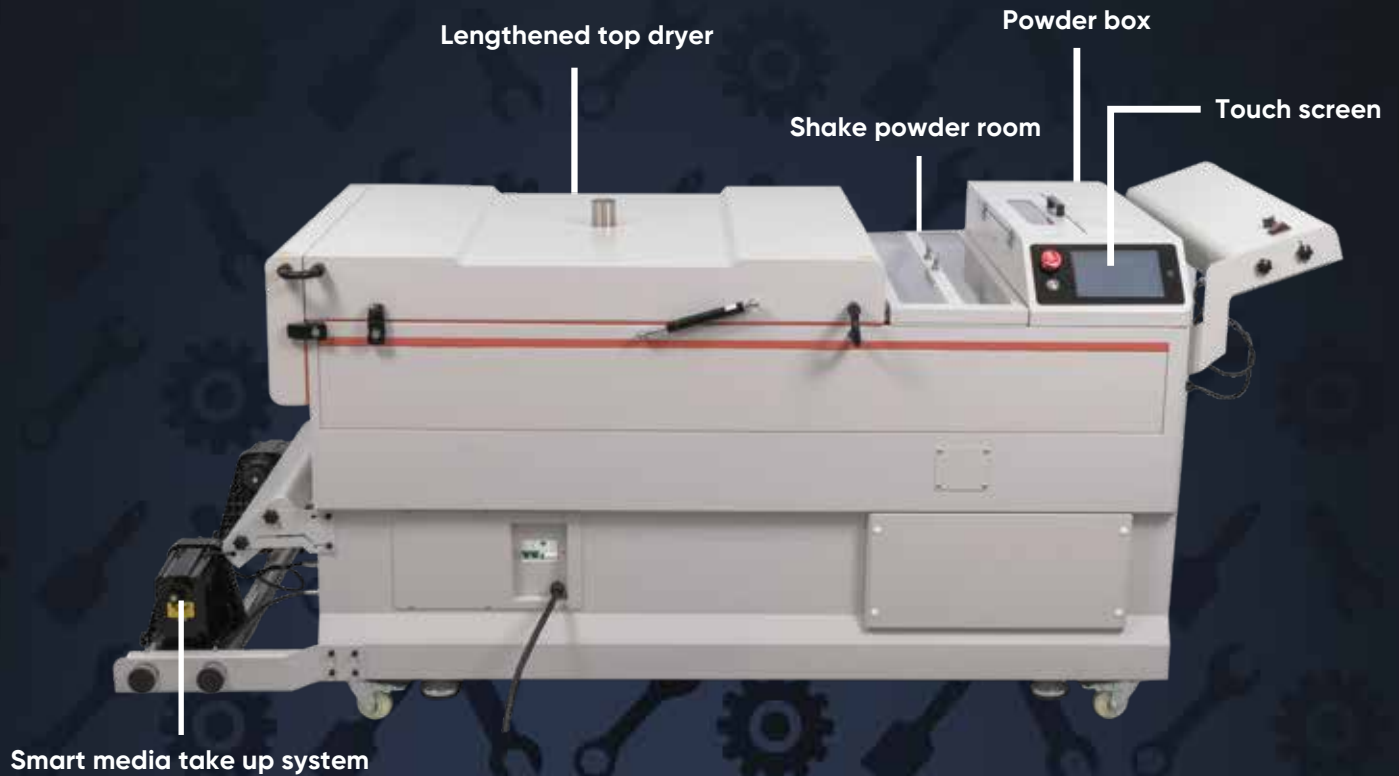


## New upgrades Shake Powder Machine 6504 PRO

### 60cm width, New touch screen, integrated control

- Universal matching, easy operate
- Suitable for high speed printing quad head machine
- Offset Print Transfer ,one-time forming, No need cut, No need tear, Less manpower
- New belt conveyor , More convenient to make a proof Cut while printing
- Extended+two-stage drying, Automatic powder Recycling
- Front heat plate ,two stages top dryer fixation, 2 rows cold fans

## Specification

Model	6504 PRO	
Wide	600mm	
Take up function	Automatic inductive	
Applicable media	Nylon, chemical fiber, cotton	
	leather, swimsuit, diving suit	
	PVC,EVA,etc...	
Powder sprinkling control	Shaking powder control	
	powder spreading control(with filterless design)	
	direction and amount of control	
Heating and drying function	Front guide heating, upper drying curing,	
	single row of cold air cooling function	
	Rated power 10KW, Energy consumption 6KW-10KW	
Automatic powder return gear	There are 1~5 five gears to choose from,and the default use of 3 gears can meet most of the printing speed	
Powder box cleaning function	Press and hold for 5 seconds to start the cleanup function	
	Manual/automatic Dusting function can be switched	
Material transfer method	Mesh belt conveyor, guide belt type	
Reel function	Automatic induction winding	
Electrical parameters	Rated voltage 220V, rated current 33A, rated power 7.2kW	
	energy consumption 5.5kW~7.2KW	
Weight	G.W:335kg N.W:230kg	
Size	Machine:2391*912*1002mm,Packing:1950*1120*1113mm	
Manual powder recycling	After clicking, the powder will automatically return to work for 60 seconds,during which the click again will	
	terminate immediately	

## Workflow



Printed DTF Film

+



Powder, shake dry



Hot stamping



It's Perfect



# PRF-100

New Filter For DTF machine



## Super Power, Super Efficiency Smoke Extract Filter Machine PRF-100

JS100 smoke lampblack filter is designed for the machine need smoke discharge like sublimation color system.

Independent design don't care about matching with print machine, open it you can use it.

Adopt the full-scale design, inner oil gas, smoke and deodorize room are all large, good filter effect

Model	Wind	Voltage	Power
JS100	250m <sup>3</sup> /h	220V	250W
Size	Machine:530*571*1366mm		Packing:675*623*1540mm
Weight	N.W 60KG		G.W 122KG



Verified

